




REV.	ECN NO.
00	

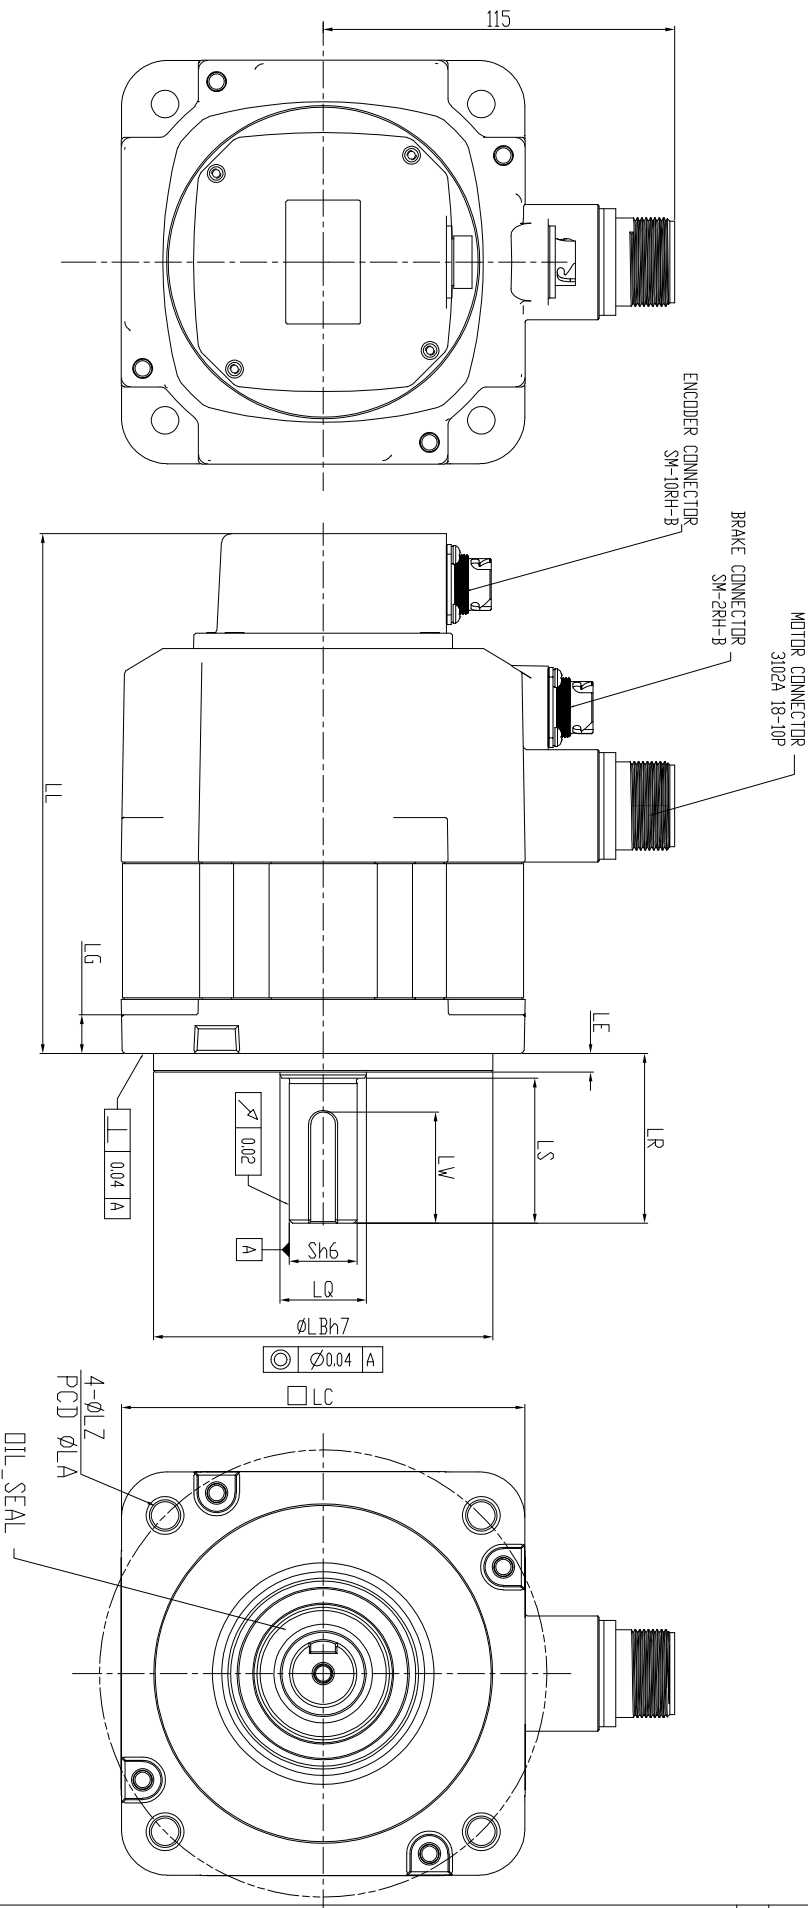


MODEL	LC	LZ	LA	S	LB	LL	LS	LR	LE	LG	LW	RH	WK	W	LQ	T	TP
ECM-B3M-XX1310S9X	130	9	145	19	110	168.5	47	55	6	12.5	25	15.5	6	6	28	6	M6, Depth 12





MOTOR CONNECTION	PIN	FUNCTION
A	U	PHASE
B	V	PHASE
C	W	PHASE
D	GND	



ENCODER CONNECTOR (XVI-10P)	PIN	FUNCTION	COLOR
1	T+		WHITE
2	T-		WHITE/RED
3	-		BROWN
4	DC +5V		BROWN
5	BA1-		BLACK/RED
6	BA1+		BLACK
7	-		
8	-		
9	GND		BLUE
10	SHD		GREEN



BRAKE CONNECTOR	PIN	FUNCTION
1	BR+	
2	BR-	



	台達電子工業股份有限公司 DELTA ELECTRONICS, INC.	DRAWN: 陳家德	DESIGN: 陳家德
		APPROVE: 徐富美	DATE: 11/12/2024

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUS OR DEVICES WITHOUT PERMISSION.	DIMENSIONAL TOLERANCES						ANGLES					
	( )	( )	( )	( )	( )	( )	( )	( )	( )	( )	( )	
	DECIMALS	<.50	±.01	<.50	±.05	<.50	±.02	<.50	±.07	>.50	±.10	
	X ±.05	±.10	±.15	>.50	±.20	>.50	±.25	>.50	±.30	>.50	±.35	
	X ±.10	±.20	±.30	>.50	±.40	>.50	±.50	>.50	±.60	>.50	±.70	

DESCRIPTION: Physical Dimension	CONFIDENTIAL	USED ON	UNIT	SCALE	0.800	SHEET 1 OF 1	REV. 01
---------------------------------	--------------	---------	------	-------	-------	--------------	---------