



Automation for a Changing World

Delta Sensorless Vector Control Compact Drive VFD-E Series



Features

► Modular Design

Modular structure and extension with optional cards

► Standard MODBUS Protocol

Standard MODBUS protocol via RS-485

► Built-in EMC Filter (230V single-phase and 460V 3-phase)

Efficiently reduces electromagnetic interference

► Compact Design

Space saving and easy DIN rail mounting with optional DIN rail adapter

► Optional Fieldbus Modules

Provide connection to a variety of networks, including PROFIBUS, DeviceNet and CANopen

► Flexible Extension

Via optional cards, such as I/O card, Relay card, PG (Encoder) card and USB card, to meet your application requirements



► RFI Switch for IT Mains

Removable "Y" capacitor to use with IT mains supplies



► Easy DC Bus Sharing

Multiple VFD-E units can be connected in parallel to share regenerative braking energy. It prevents over-voltage and stabilizes the DC bus voltage

► Complete Protection Functions

High precision current detection, full overload protection (oL, oL1 and oL2), overvoltage/overcurrent stall prevention, short circuit protection, reset after fault, speed search function and motor overheating protection by PTC


► Removable Keypad

The standard keypad acts as a status monitor. More functions, including parameter modification, RUN/STOP, speed change, and status display, are available via an optional keypad



► Built-in PLC Function

PLC programming and editing capability without the need of an actual PLC

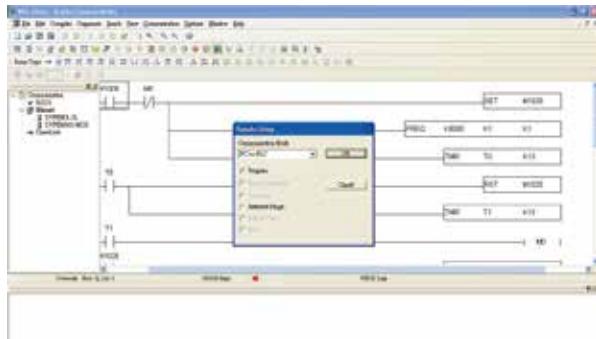

► Side-by-side Installation (40 °C)

High-efficiency cooling and flexible spacing



► Power Range

Single-phase 115V series: 0.2~0.75 kW (0.25~1 hp)

Single-phase 230V series: 0.2~2.2 kW (0.25~3 hp)

3-phase 230V series: 0.2~15 kW (0.25~20 hp)

3-phase 460V series: 0.4~22 kW (0.50~30 hp)

► Easy Maintenance

Removable cooling fan for easy maintenance



> Applications


► Vacuum compressor

Outstanding overload capability of VFD-E reduces the impact of sudden load increase to the vacuum compressor




► Escalator

Built-in PLC function and multi-step speed control provide energy saving escalator performance and save the cost of purchasing a host controller

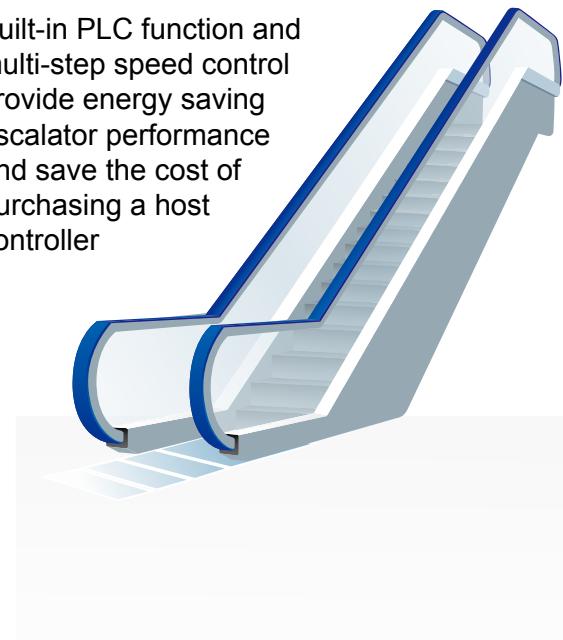

Standard Wiring Diagram

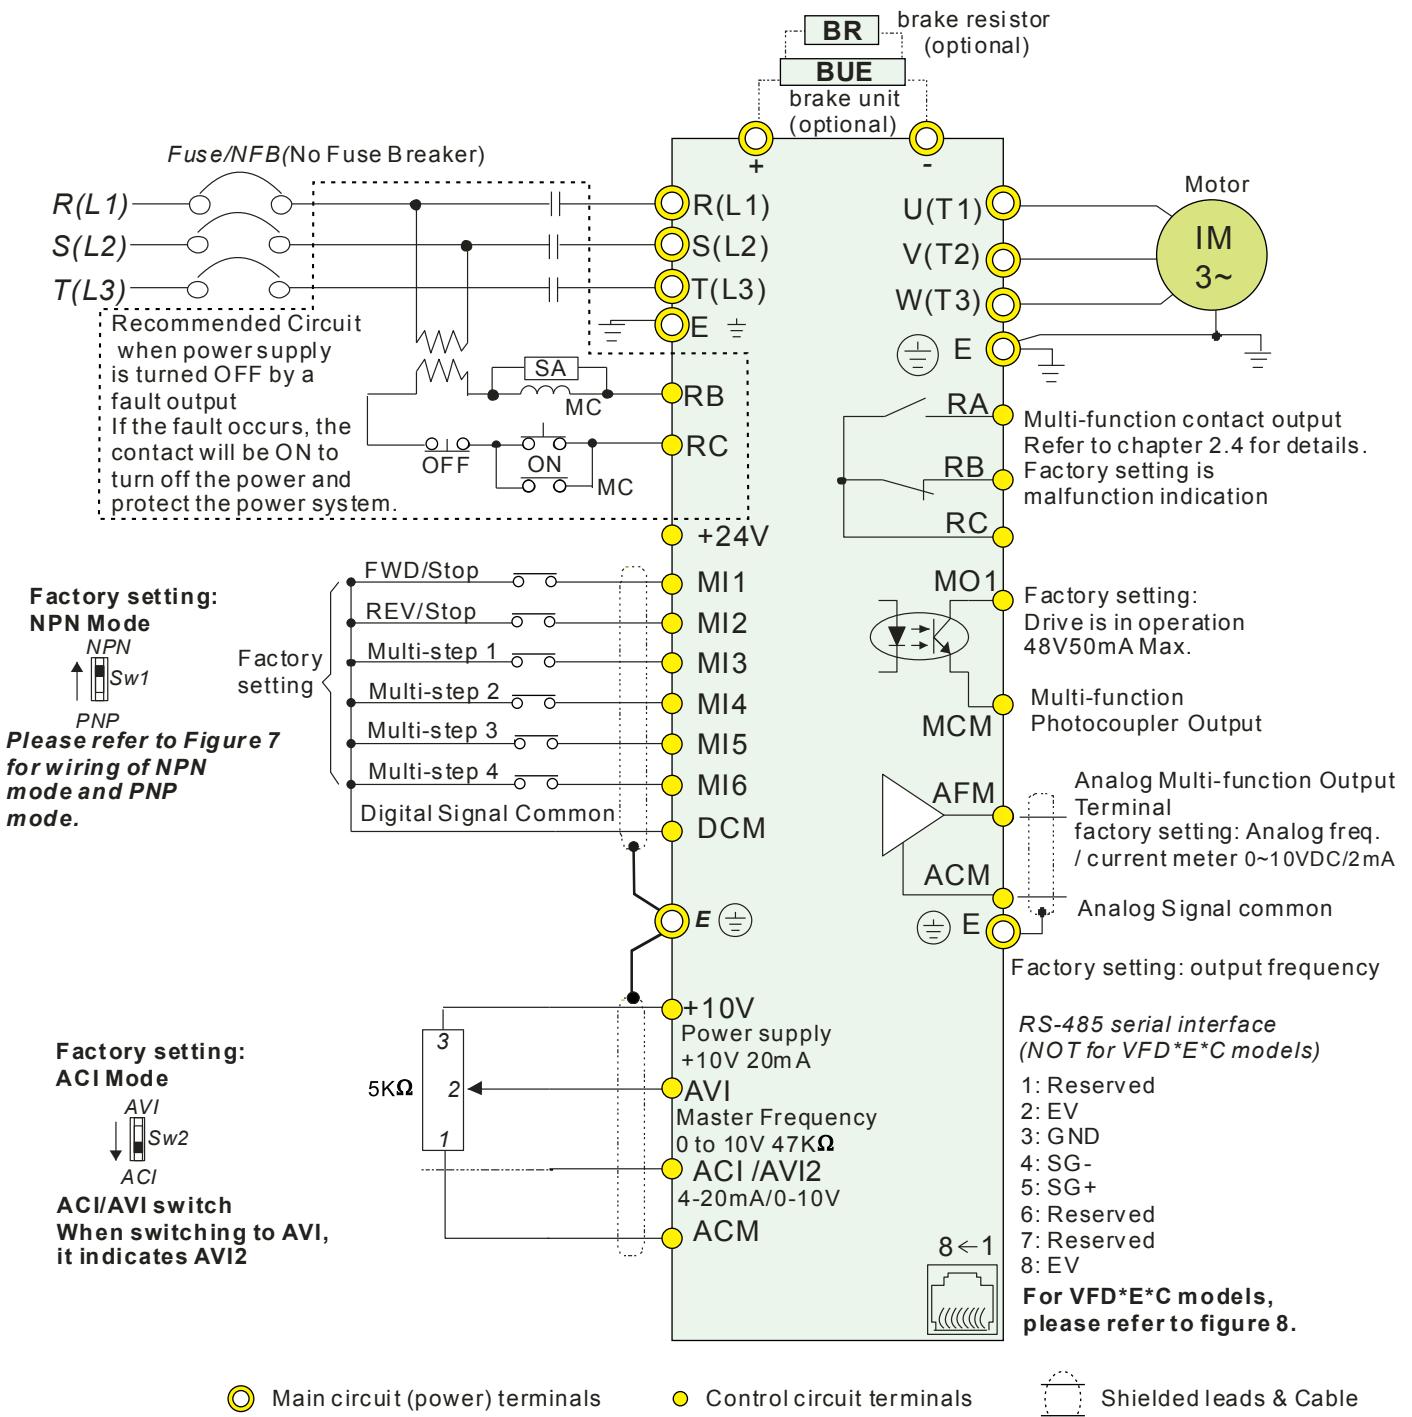


NOTE


It is recommended to install a circuit breaker at the control terminal to protect the circuit from an operation abnormality or sudden power outage.

The protection circuit uses the multi-function output terminal of the AC motor drive for connection. When an abnormal condition (closed contact) occurs, the external power supply is disconnected to protect the power system of the AC motor drive.


External Parts

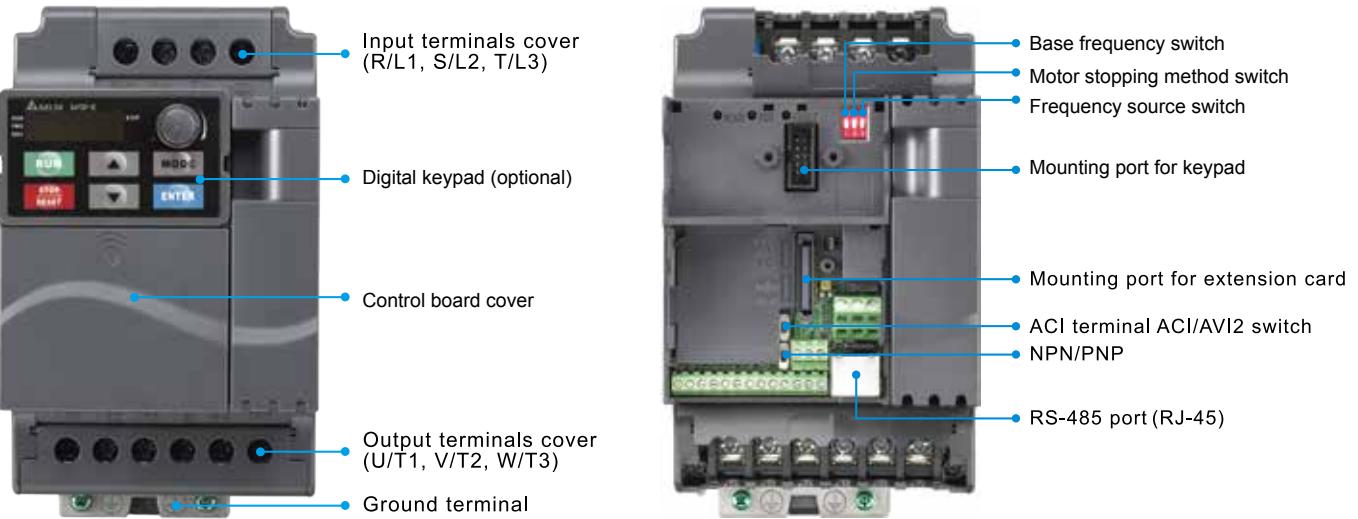

Control Terminals

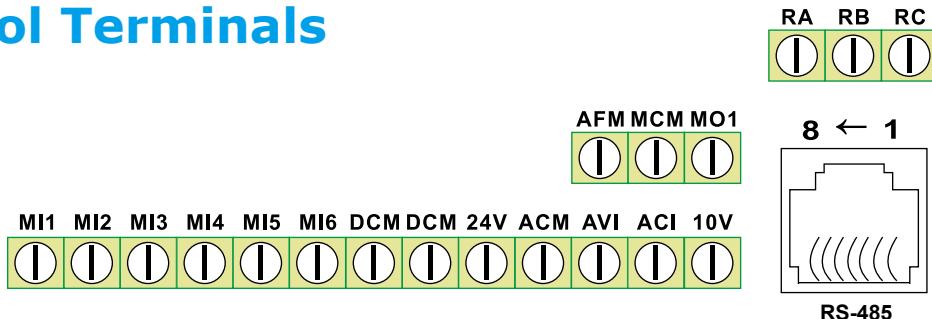


Model Explanation

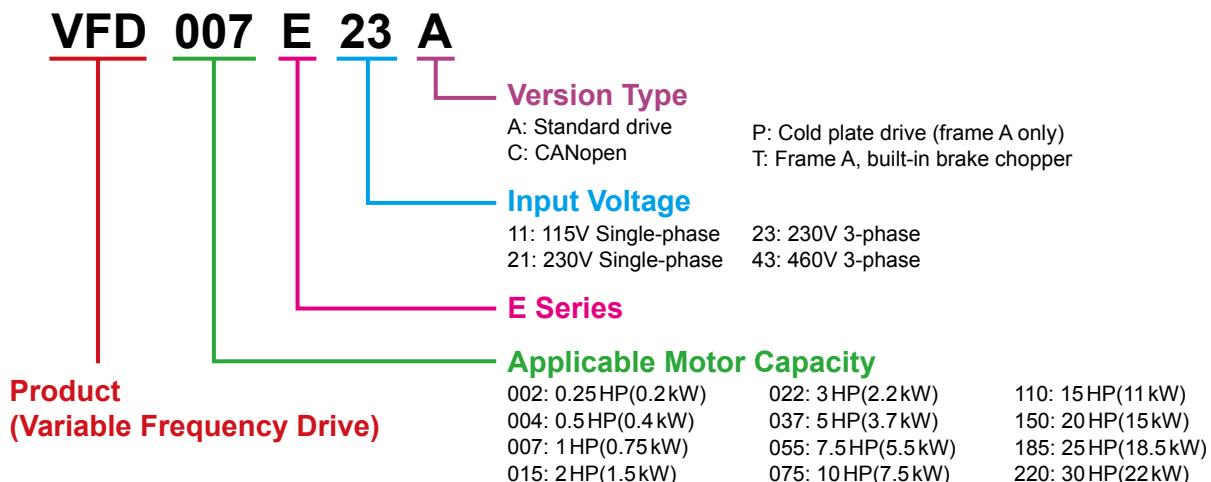

Application Fields

Conveyor and Transportation Machinery

- Conveyor belt
- Automatic door
- Roller door
- Small elevator
- Escalator
- X-Y axis traveling crane

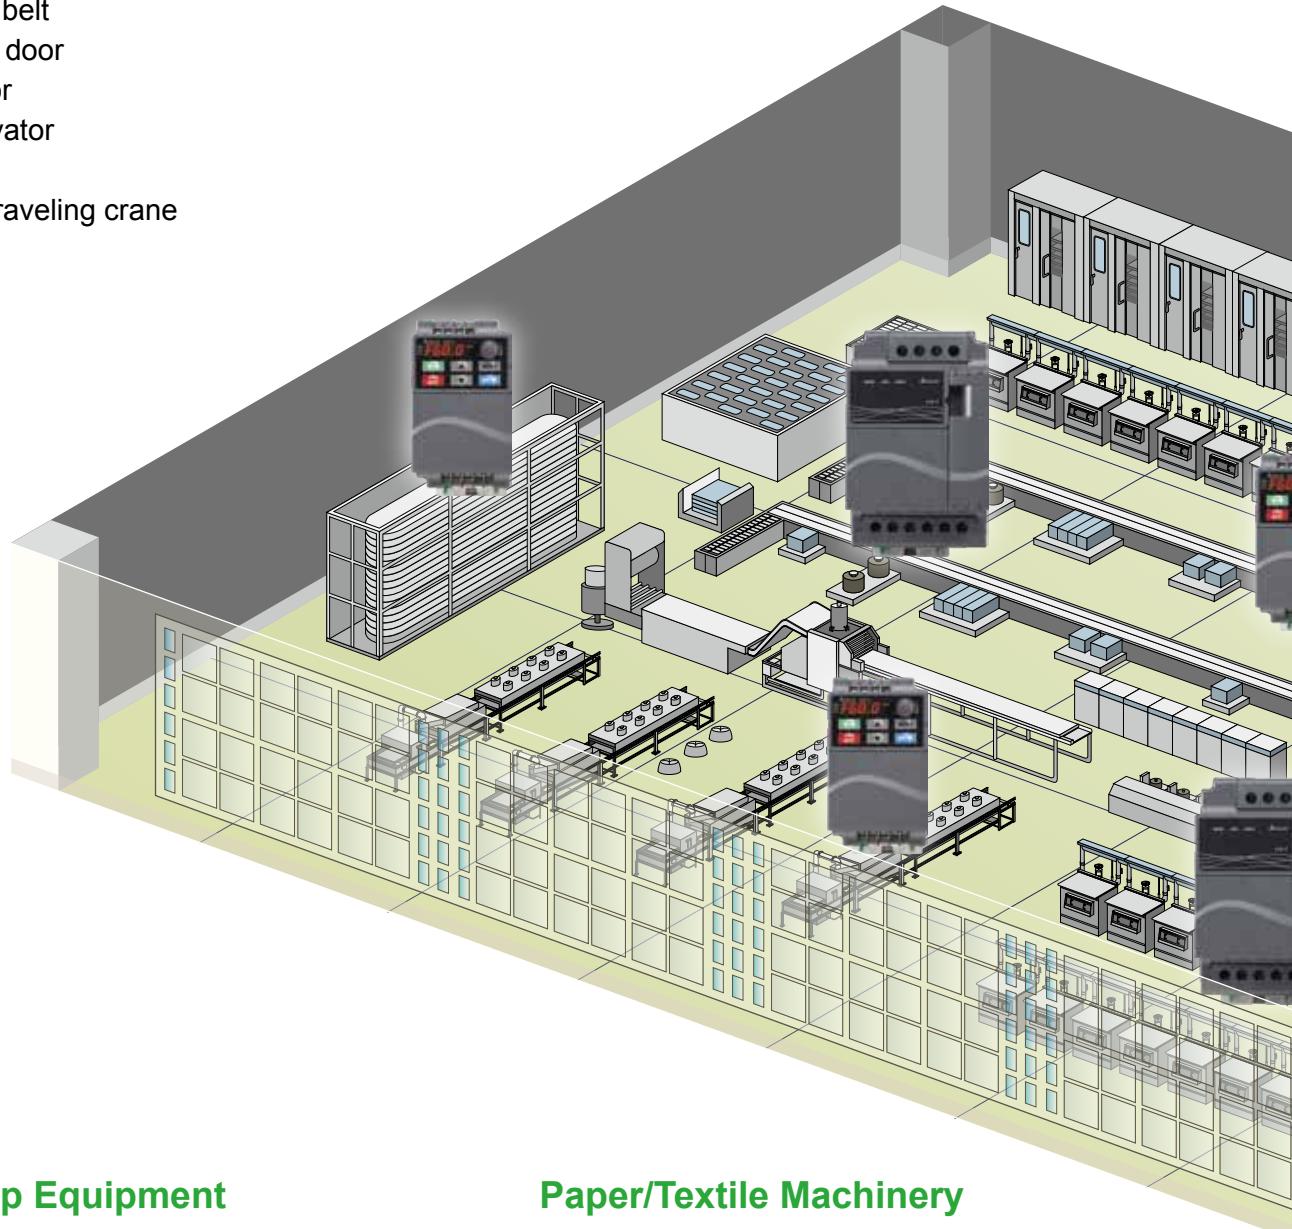

Fan/Pump Equipment

- Building air conditioning system
- Wastewater processing system
- Constant pressure water treatment system
- Water treatment pump
- Agricultural pump
- Temperature control of mid and larger oven
- Air compressor
- Heat exchange fan
- Building water dispenser system
- Dryer's windmill

Paper/Textile Machinery

- Round weaver
- Cross weaver
- Ribbon weaver
- Printing press
- Industrial sewing machine
- Knitting machine

Food Processing


- Dumpling making machine
- Food mixer
- Noodle making machine

Wood Working Machinery

- 4 side planer
- Wood carving machine
- Woodworking machine
- Simple cutting machine for wood working
- Spraying machine

Machine Tool/Metal Processing Machinery

- Grinding machine
- Drilling machine
- Small lathe
- Milling machine
- Injection molding (clamp)

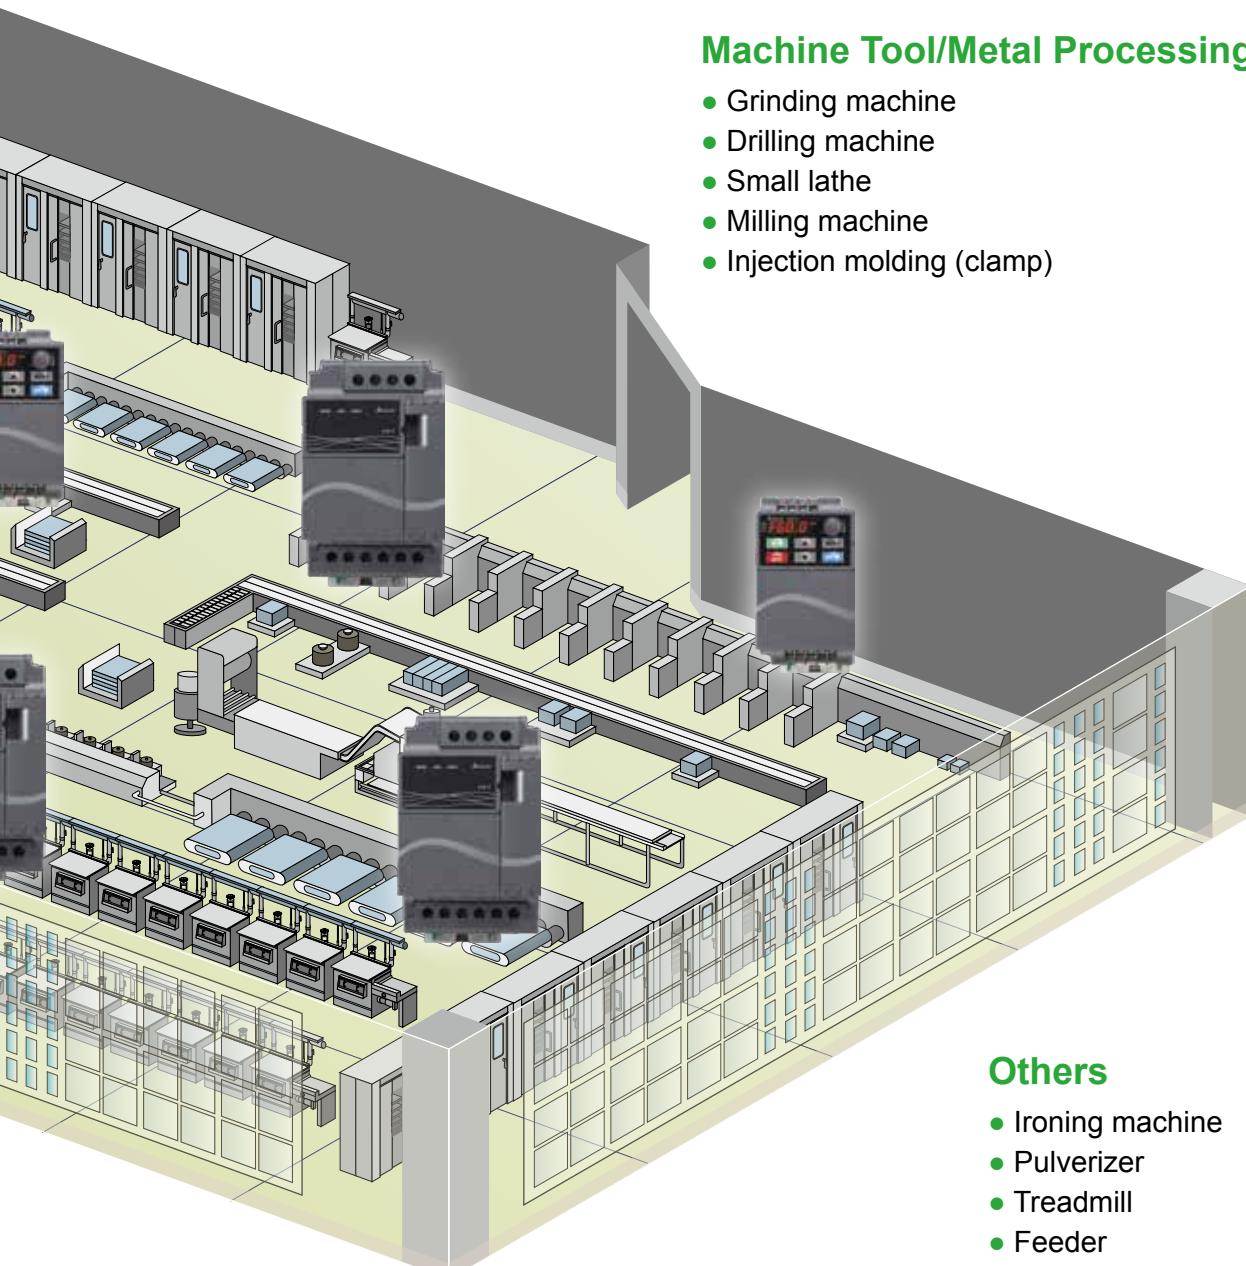

Others

- Ironing machine
- Pulverizer
- Treadmill
- Feeder
- Industrial washing machine
- Car washing machine
- Packing machine
- Centrifuge
- Liquid mixing machine


Specifications

115V	Voltage Class	115V																											
	Model Number VFD-__ E	002		004		007																							
	Max. Applicable Motor Output (kW)	0.2		0.4		0.75																							
	Max. Applicable Motor Output (hp)	0.25		0.5		1.0																							
	Rated Output Capacity (kVA)	0.6		1.0		1.6																							
	Rated Output Current (A)	1.6		2.5		4.2																							
	Maximum Output Voltage (V)	3-phase proportional to twice the input voltage																											
	Output Frequency (Hz)	0.1~599 Hz																											
	Carrier Frequency (kHz)	1~15																											
	Single-phase	6		9		18																							
Input Rating	Rated Input Current (A)	Single-phase 100~120V, 50/60Hz																											
	Rated Voltage/Frequency	±10% (90~132V)																											
	Voltage Tolerance	±5% (47~63Hz)																											
	Cooling Method	Natural cooling						Fan cooling																					
	Weight (kg)	1.2		1.2		1.2																							
230V	Voltage Class	230V																											
	Model Number VFD-__ E	002	004	007	015	022	037	055	075	110	150																		
	Max. Applicable Motor Output (kW)	0.2	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15																		
	Max. Applicable Motor Output (hp)	0.25	0.5	1.0	2.0	3.0	5.0	7.5	10	15	20																		
	Rated Output Capacity (kVA)	0.6	1.0	1.6	2.9	4.2	6.5	9.5	12.5	17.1	25																		
	Rated Output Current (A)	1.6	2.5	4.2	7.5	11	17	25	33	45	65																		
	Maximum Output Voltage (V)	3-phase proportional to twice the input voltage																											
	Output Frequency (Hz)	0.1~599 Hz																											
	Carrier Frequency (kHz)	1~15																											
	Single/3-phase	4.9/1.9		6.5/2.7		9.7/5.1		15.7/9		24/15		20.6		26		34		48		70									
Input Rating	Rated Voltage/Frequency	Single/3-phase, 200~240V, 50/60Hz										3-phase, 200~240V, 50/60Hz																	
	Voltage Tolerance	±10% (180~264V)																											
	Frequency Tolerance	±5% (47~63Hz)																											
	Natural cooling	Natural cooling																											
	Fan cooling	Fan cooling																											
460V	Weight (kg)	1.1	1.1	1.1	1.9	1.9	1.9	3.5	3.5	3.57	6.6																		
	Voltage Class	460V																											
	Model Number VFD-__ E	004	007	015	022	037	055	075	110	150	185	220																	
	Max. Applicable Motor Output (kW)	0.4	0.75	1.5	2.2	3.7	5.5	7.5	11	15	18.5	22																	
	Max. Applicable Motor Output (hp)	0.5	1.0	2.0	3.0	5.0	7.5	10	15	20	25	30																	
	Rated Output Capacity (kVA)	1.2	2.0	3.3	4.4	6.8	9.9	13.7	18.3	24	29	34																	
	Rated Output Current (A)	1.5	2.5	4.2	5.5	8.5	13	18	24	32	38	45																	
	Maximum Output Voltage (V)	3-phase proportional to input voltage																											
	Output Frequency (Hz)	0.1~599 Hz																											
	Carrier Frequency (kHz)	1~15																											
Input Rating	3-phase	3-phase																											
	Rated Input Current (A)	1.9	3.2	4.3	7.1	11.2	14	19	26	35	41	49																	
	3-phase, 380~480V, 50/60Hz	3-phase, 380~480V, 50/60Hz																											
	Voltage Tolerance	±10% (342~528V)																											
	Frequency Tolerance	±5% (47~63Hz)																											
Cooling Method	Natural cooling	Natural cooling																											
	Fan cooling	Fan cooling																											
Weight (kg)	1.2	1.2	1.2	1.9	1.9	4.2	4.2	4.2	7.47	7.47	7.47																		

Control Characteristics	Control System	SPWM (Sinusoidal Pulse Width Modulation) Control (V/F or sensorless vector control)
	Frequency Setting Resolution	0.01Hz
	Output Frequency Resolution	0.01Hz
	Torque Characteristics	Including the auto-torque/auto-slip compensation; starting torque can be 150% at 3.0Hz
	Overload Endurance	150% of rated current for 1 minute
	Skip Frequency	Three zones, setting range 0.1~599Hz
	Accel/Decel Time	0.1 to 600 seconds (2 Independent setting of Accel/Decel time)
	Stall Prevention Level	Setting 20 to 250% of rated current
	DC Braking	Operation frequency 0.1~599.0Hz, output 0~100% rated current Start time 0~60 seconds, stop time 0~60 seconds
	Regenerated Braking Torque	Approx. 20% (up to 125% possible with optional brake resistor or externally mounted brake unit, 1-15hp models (built-in brake chopper))
Operating Characteristics	V/F Pattern	Adjustable V/F pattern
	Frequency Setting	Setting by ▲▼
	External Signal	Potentiometer 5kΩ/0.5W, 0 to +10V _{DC} , 4 to 20mA, RS-485 interface; Multi-function Inputs 3 to 9 (15 steps, Jog, up/down)
	Operation Setting Signal	Set by RUN and STOP
	Keypad	2 wires/3 wires (MI1, MI2, MI3), JOG operation, RS-485 serial interface (MODBUS), programmable logic controller
	External Signal	Multi-step selection 0 to 15, Jog, accel/decel inhibit, 2 accel/decel switches, counter, external Base Block (NC, NO), auxiliary motor control is invalid, AC1/AV1/AUI selections, driver reset, UP/DOWN key settings, sink/source (=NPN/PNP) selection
	Multi-function Input Signal	AC drive operating, frequency attained, non-zero frequency, Base Block, fault indication, local/remote indication, auxiliary motor output, drive is ready, overheat alarm, emergency stop and status selections of input terminals (NC/NO)
	Multi-function Output Indication	Output frequency/current
	Analog Output Signal	Contact will be On when drive malfunctions (1 Form C/change-over contact or 1 open collector output)
	Alarm Output Contact	Built-in PLC, AVR, accel/decel S-Curve, over-voltage/over-current stall prevention, 5 fault records, reverse inhibition, momentary power loss restart, DC braking, auto torque/slip compensation, auto tuning, adjustable carrier frequency, output frequency limits, parameter lock/reset, vector control, PID control, external counter, MODBUS communication, abnormal reset, abnormal re-start, power-saving, sleep/wake function, fan control, 1st/2nd frequency source selections, 1st/2nd frequency source combination, NPN/PNP selection
Environmental Conditions	Operation Functions	Over voltage, over current, under voltage, under current, external fault, overload, ground fault, overheating, electronic thermal, IGBT short circuit, PTC, instantly stop and then reboot (up to 20 sec by setting parameter)
	Protection Functions	6-key, 7-segment LED with 4-digit, 5 status LED, master frequency, output frequency, output current, custom units, parameter values for setup and lock, faults, RUN, STOP, RESET, FWD/REV
	Display Keypad	For 230V 1-phase and 460V 3-phase models
	Built-in EMC Filter	IP20
	Enclosure Rating	2
	Pollution Degree	Altitude 1,000m or lower, keep from corrosive gasses, liquid and dust
	Installation Location	-10°C to + 50°C (40°C for side-by-side mounting) Non-Condensing and not frozen
	Ambient Temperature	-20°C to 60°C
	Storage/Transportation Temperature	Below 90% RH (non-condensing)
	Ambient Humidity	10Hz ≤ f ≤ 57Hz Fix Amplitude: 0.075mm, 57Hz ≤ f ≤ 150Hz Fix Acceleration: 1G (According to IEC 60068-2-6)
	Vibration	  
	Certifications	


Dimensions

Frame A1

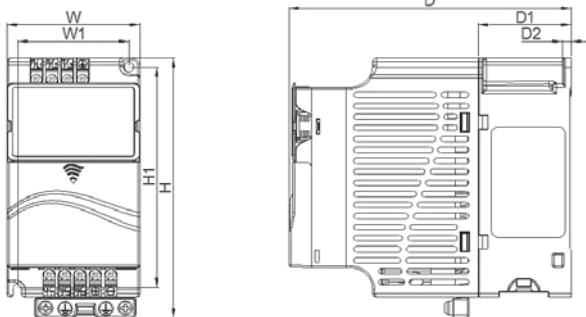

MODEL


VFD002E11A/11C/11T
VFD002E21A/21C/21T
VFD002E23A/23C/23T
VFD004E11A/11C/11T
VFD004E21A/21C/21T
VFD004E23A/23C/23T
VFD004E43A/43C/43T
VFD007E23A/23C/23T
VFD007E43A/43C/43T

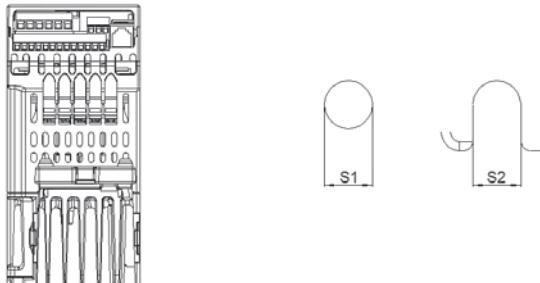

Unit: mm[inch]


Frame		W	W1	H	H1	D	D1	D2	S1	S2
A1	mm	72.0	60.0	142.0	120.0	152.0	50.0	4.5	5.2	5.2
	inch	2.83	2.36	5.59	4.72	5.98	1.97	0.18	0.20	0.20

Frame A2

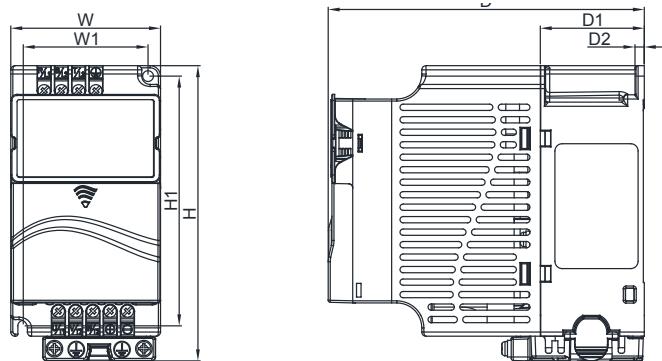

MODEL


VFD015E23A/23C/23T
VFD015E43A/43C/43T

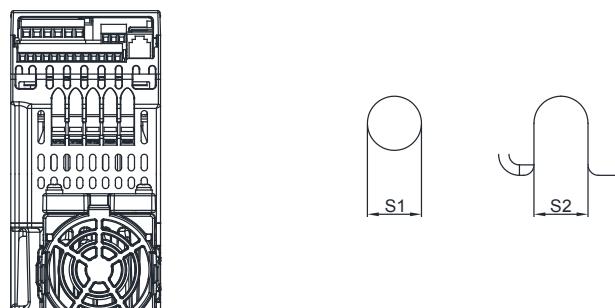

Unit: mm[inch]


Frame		W	W1	H	H1	D	D1	D2	S1	S2
A2	mm	72.0	60.0	142.0	120.0	152.0	50.0	4.5	5.2	5.2
	inch	2.83	2.36	5.59	4.72	5.98	1.97	0.18	0.20	0.20

Frame A3

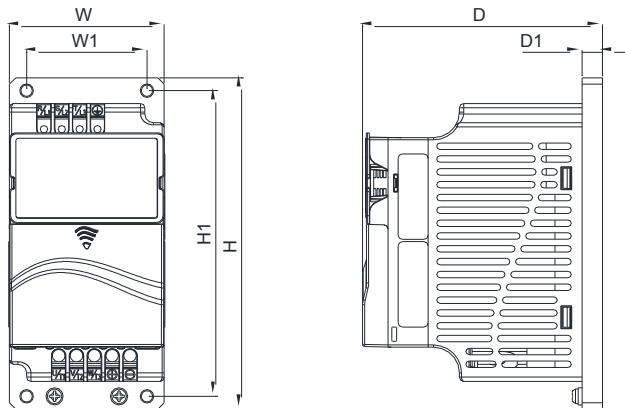

MODEL


VFD002E11P/21P/23P
VFD004E11P/21P/23P/43P
VFD007E21P/23P/43P
VFD015E23P/43P

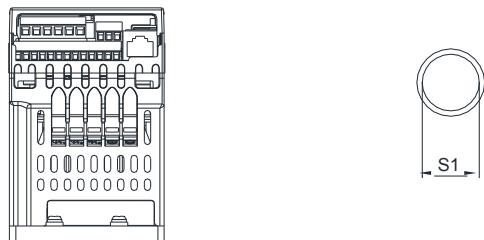

Unit: mm[inch]


Frame	W	W1	H	H1	D	D1	S1
A3	mm	72.0	56.0	155.0	143.0	111.5	9.5
	inch	2.83	2.20	6.10	5.63	4.39	0.37

Frame B

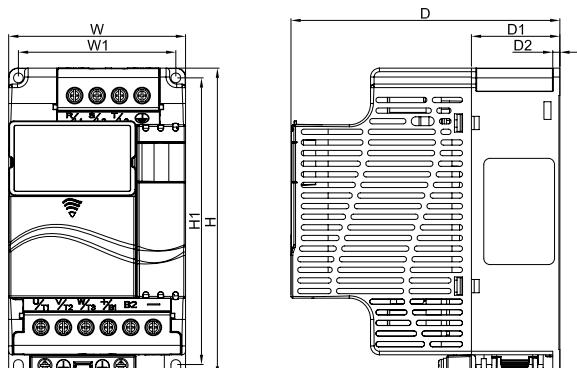

MODEL


VFD007E11A/11C
VFD015E21A/21C
VFD022E21A/21C
VFD022E23A/23C
VFD022E43A/43C
VFD037E23A/23C
VFD037E43A/43C

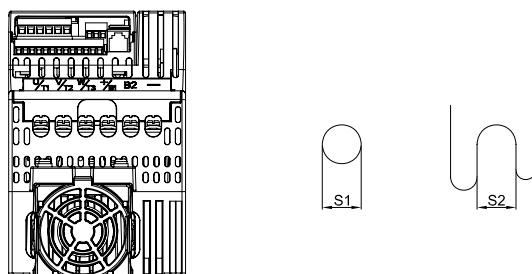

Unit: mm[inch]


Frame	W	H	D	W1	H1	D1	D2	S1	S2
B	mm	100.0	174.0	152.0	89.0	162.0	50.0	4.0	5.5
	inch	3.94	6.86	5.98	3.50	6.86	1.97	0.16	0.22

Frame C

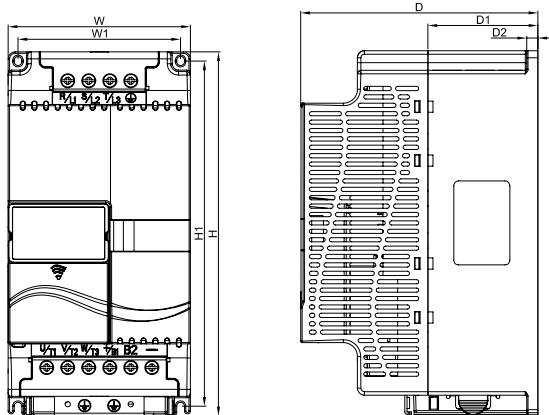

MODEL



VFD055E23A/23C
VFD055E43A/43C
VFD075E23A/23C
VFD075E43A/43C
VFD110E23A/23C
VFD110E43A/43C



Unit: mm[inch]

Frame		W	H	D	W1	H1	D1	D2	S1	S2
C	mm	130.0	260.0	169.2	116.0	246.5	78.5	8.0	6.5	5.5
	inch	5.12	10.24	6.66	4.57	9.70	3.09	0.31	0.26	0.22

Frame D

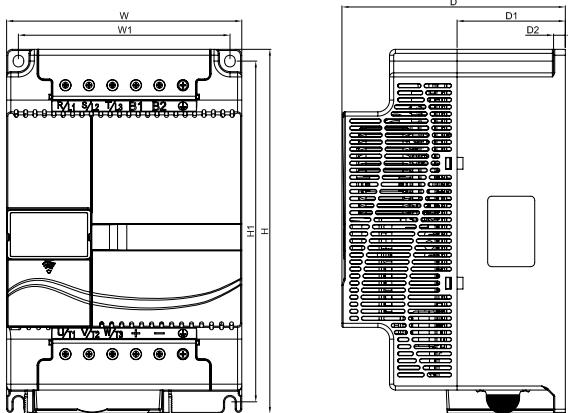

Unit: mm[inch]


MODEL

VFD150E23A/23C
VFD150E43A/43C
VFD185E43A/43C
VFD220E43A/43C

Frame		W	H	D	W1	H1	D1	D2	S1	S2
D	mm	200.0	310.0	190.0	180.0	290.0	92.0	10.0	10.0	9.0
	inch	7.87	12.20	7.48	7.09	11.42	3.62	0.39	0.39	0.35

Accessories

Option Cards



■ EME-R3AA

Relay card
(3 form A/ NO contacts)



■ EME-R2CA

Relay card
(2 form C/Change-over contacts)



■ EME-A1D3A

Anglog I/O Card (12 bits)



■ EME-A22A

Anglog I/O Card (12 bits)



■ EME-PG01

PG card




■ CME-USB01

Second communication card
(USB1.1)




■ EME-D33A

I/O card
(photocoupler 3in + 3out)



■ EME-D611A

Multi-function Input
Terminal MI1~MI6-COM Card
(For Internal Installation)



■ EME-D611B

Multi-function Input Terminal
MI1~MI6-COM Card
(For External Installation)

Accessories

Fieldbus Modules



▪ **DeviceNet**
CME-DN01



▪ **PROFIBUS**
CME-PD01



▪ **CANopen**
CME-COP01


Others



▪ **Brake Unit**
BUE-20015 BUE-40015
BUE-20037 BUE-40037



▪ **Keypad for Communication**
VFD-PU06 / KPC-CC01



▪ **DIN Rail (Width 35mm)**
MKE-DRA MKE-DRB



▪ **Brake Resistor**



▪ **Zero Phase Reactor**
RF220X00A



▪ **Grounding Plate**
MKE-EP



▪ **Digital Keypad**

Ordering Information

VFD-E Series

Frame Size	Power Range	Models
Frame A1~A3	 115V: 0.2 kW ~ 0.4 kW 230V: 0.2 kW ~ 1.5 kW 460V: 0.4 kW ~ 1.5 kW	Frame A1: VFD002E11A/11C/11T VFD002E21A/21C/21T VFD002E23A/23C/23T VFD004E11A/11C/11T VFD004E21A/21C/21T
		Frame A2: VFD015E23A/23C/23T VFD015E43A/43C/43T
		Frame A3: VFD002E11P/21P/23P VFD004E11P/21P/23P/43P
Frame B	 115V: 0.75 kW 230V: 1.5 kW ~ 3.7 kW 460V: 2.2 kW ~ 3.7 kW	VFD007E11A/11C VFD015E21A/21C VFD022E21A/21C VFD022E23A/23C VFD022E43A/43C VFD037E23A/23C VFD037E43A/43C
Frame C	 230V: 5.5 kW ~ 11 kW 460V: 5.5 kW ~ 11 kW	VFD055E23A/23C VFD055E43A/43C VFD075E23A/23C VFD075E43A/43C VFD110E23A/23C VFD110E43A/43C
Frame D	 230V: 15 kW 460V: 15 kW ~ 22 kW	VFD150E23A/23C VFD150E43A/43C VFD185E43A/43C VFD220E43A/43C



Smarter. Greener. Together.

Industrial Automation Headquarters

Taiwan: Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan District,
Taoyuan City 33068, Taiwan
TEL: +886-3-362-6301 / FAX: +886-3-371-6301

Asia

China: Delta Electronics (Shanghai) Co., Ltd.

No.182 Minyu Rd., Pudong Shanghai, P.R.C.
Post code : 201209
TEL: +86-21-6872-3988 / FAX: +86-21-6872-3996
Customer Service: 400-820-9595

Japan: Delta Electronics (Japan), Inc.

Industrial Automation Sales Department
2-1-14 Shibadaimon, Minato-ku
Tokyo, Japan 105-0012
TEL: +81-3-5733-1155 / FAX: +81-3-5733-1255

Korea: Delta Electronics (Korea), Inc.

1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,
Seoul, 08501 South Korea
TEL: +82-2-515-5305 / FAX: +82-2-515-5302

Singapore: Delta Energy Systems (Singapore) Pte Ltd.

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939
TEL: +65-6747-5155 / FAX: +65-6744-9228

India: Delta Electronics (India) Pvt. Ltd.

Plot No.43, Sector 35, HSIIDC Gurgaon,
PIN 122001, Haryana, India
TEL: +91-124-4874900 / FAX: +91-124-4874945

Thailand: Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),
Pattana 1 Rd., T.Phraksa, A.Muang,
Samutprakarn 10280, Thailand
TEL: +66-2709-2800 / FAX: +66-2709-2827

Australia: Delta Electronics (Australia) Pty Ltd.

Unit 20-21/45 Normanby Rd., Notting Hill Vic 3168, Australia
TEL: +61-3-9543-3720

Americas

USA: Delta Electronics (Americas) Ltd.

5101 Davis Drive, Research Triangle Park, NC 27709, U.S.A.
TEL: +1-919-767-3813 / FAX: +1-919-767-3969

Brazil: Delta Electronics Brazil

Rua Itapeva, 26 - 3°, andar Edificio Itapeva,
One - Bela Vista 01332-000 - São Paulo - SP - Brazil
TEL: +55-12-3932-2300 / FAX: +55-12-3932-237

Mexico: Delta Electronics International Mexico S.A. de C.V.

Gustavo Baz No. 309 Edificio E PB 103
Colonia La Loma, CP 54060
Tlalnepantla, Estado de México
TEL: +52-55-3603-9200

EMEA

EMEA Headquarters: Delta Electronics (Netherlands) B.V.

Sales: Sales.IA.EMEA@deltaww.com
Marketing: Marketing.IA.EMEA@deltaww.com
Technical Support: iatechnicalsupport@deltaww.com
Customer Support: Customer-Support@deltaww.com
Service: Service.IA.emea@deltaww.com
TEL: +31(0)40 800 3900

BENELUX: Delta Electronics (Netherlands) B.V.

Automotive Campus 260, 5708 JZ Helmond, The Netherlands
Mail: Sales.IA.Benelux@deltaww.com
TEL: +31(0)40 800 3900

DACH: Delta Electronics (Netherlands) B.V.

Coesterweg 45, D-59494 Soest, Germany
Mail: Sales.IA.DACH@deltaww.com
TEL: +49(0)2921 987 0

France: Delta Electronics (France) S.A.

ZI du bois Challand 2, 15 rue des Pyrénées,
Lisses, 91090 Evry Cedex, France
Mail: Sales.IA.FR@deltaww.com
TEL: +33(0)1 69 77 82 60

Iberia: Delta Electronics Solutions (Spain) S.L.U

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.
Hormigueras – P.I. de Vallecas 28031 Madrid
TEL: +34(0)91 223 74 20
Carrer Llacuna 166, 08018 Barcelona, Spain
Mail: Sales.IA.Iberia@deltaww.com

Italy: Delta Electronics (Italy) S.r.l.

Via Meda 2-22060 Novegrate(CO)
Piazza Grazioli 18 00186 Roma Italy
Mail: Sales.IA.Italy@deltaww.com
TEL: +39 039 8900365

Russia: Delta Energy System LLC

Vereyskaya Plaza II, office 112 Vereyskaya str.
17 121357 Moscow Russia
Mail: Sales.IA.RU@deltaww.com
TEL: +7 495 644 3240

Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)

Serifali Mah. Hendem Cad. Kule Sok. No:16-A
34775 Ümraniye – İstanbul
Mail: Sales.IA.Turkey@deltaww.com
TEL: +90 216 499 9910

MEA: Eltek Dubai (Eltek MEA DMCC)

OFFICE 2504, 25th Floor, Saba Tower 1,
Jumeirah Lakes Towers, Dubai, UAE
Mail: Sales.IA.MEA@deltaww.com
TEL: +971(0)4 2690148